


lino exposed wall-mounted faucet W35, IR-sensor, with thermostat, battery, 260 mm, chrome

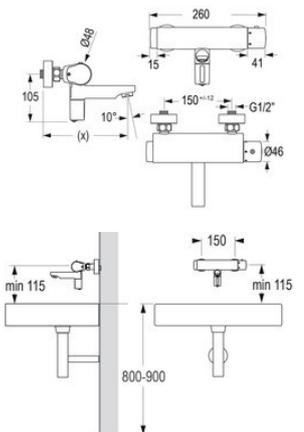

Touchless, electronically controlled wall-mounted faucet for surface installation:

- Sturdy version, faucet body made of brass, chromed
- Stiff spout and fixed sensor
- Dual infrared sensors (with automatic setting feature), microprocessor
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Temperature adjustable with thermostat-cartridge
- With anti-scalding and auto-thermic protection
- Temporary-off (cleaning) and continuous water flow time (filling of basin) activated by Click-plus
- Continuous water flow adjustable with Click
- Follow-up time and sensor sensitivity adjustable with function key
- 12, 24 or 48-hour hygienic flush activatable with Click
- Including S-connectors 3/4" and rosettes (lockable S-connector optional)
- Compatible with Service Monitor: control of stored operational data, settings and control functions

Use: IR-sensor, contact-free activation

Mixture: with thermostat

Power supply: battery, 6V Lithium CRP 2 (standard: life time up to 4 years)

Spout (x): 260 mm

Colour: chrome

Operating pressure: 0,3-10 bar

Flow rate: Approx. 5 l/min / 1,3 gpm (3bar)

Max. water temperature: 80 °C

Aerator: Economic aerator, CASCADE (self-cleaning)

Built-in filters: 0,5 mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology

Follow-up time: 1 sec. pre-set (adjustable with Click 0-10 sec.)

Continuous water flow: 2 min. pre-set (adjustable with Click 0,5-20 min.)

Hygienic flush time: Adjustable with Touch 3 sec.- 20 min.; 2 min. (fixed)

Temporary-off: 2 min. (fixed)

Engineering standards: DIN EN 200;CE

Optional: Conversion kit temperature handle with fixed temperature limit at 42 °C (see accessories)